


New item - Square dmx512 RGBW pixel led module with lens for lighting box -Dc24V 4W with beam angle 175 degree

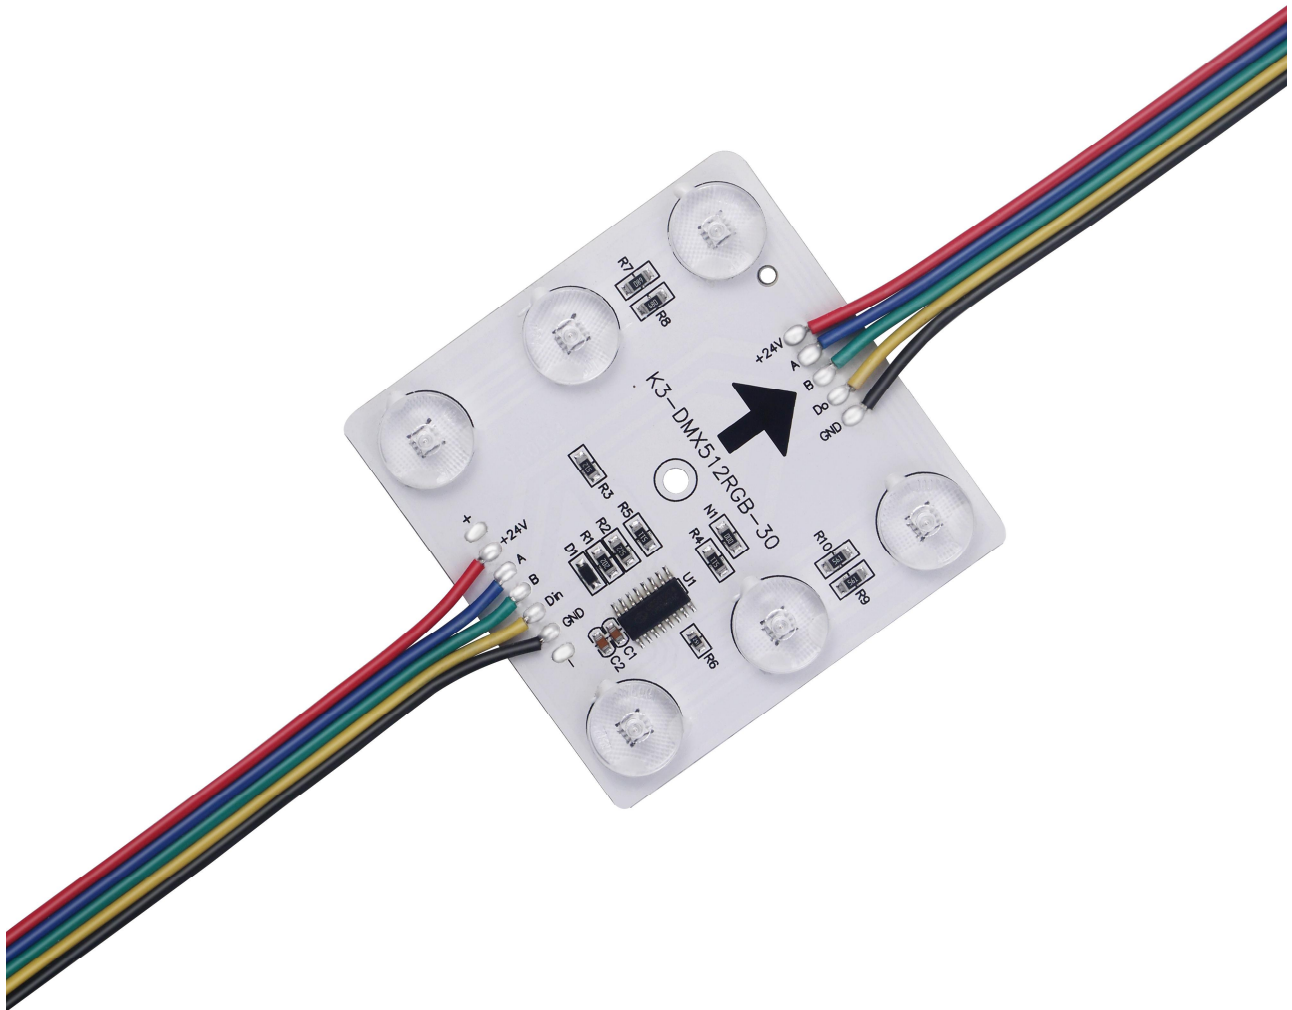

Feature

- 1) Very Bright RGB or white 3030 led lamp with copper bracket and gold wire.
- 2) Double RF4 quality PCB board with 1.0mm Thickness .
- 3) Double layer aluminum substrate board for better protection
- 4) Standard dmx512 protocol -TM512 chipset -
- 5) Every 20pcs per string with 20cm center distance
- 6) DC24V, 4W per meter(max)
- 7) LED density: 4pcs 3030 RGB+2pcs white 3030 led
- 8) Controller system: artnet or offline or online dmx512 led controller

Parameter

Part No	RL-dmx512-3030RGBW-6-24V
Lighting Source	San an 3030RGB led+white 3030 led
Operate Voltage	DC24V
Consumption Watt/M	4 Watt per meter (max)
PCB quality	Double layer 2oz Aluminium substrate pcb board
Beam angle	175 degree
Power /Pcs	4Watt per pcs
IC chip	TM512 IC
Cable	AWG20
Plug and cable	5pin female and male connector with 20cm cable at ends
Waterproof Grade	IP20
Size	70mmX70mmX10mm (LXWXH)
warranty	2years

Terminal

There is 5 Pin cable on both end for signal input/output and power inputs at ends.
Color definition:

24V -- RED, DataA--Blue ,DataB Green, Address: Yellow ,GND -- Black


<https://www.rose-lighting.com> Email:info@rose-lighting.com

TEL:0755-23763467



Phone:008618675649004


Add: No.53 Yuexing Rd, Guanlan Street ,Longhua District,Shenzhen, China
518110

Wiring Chart

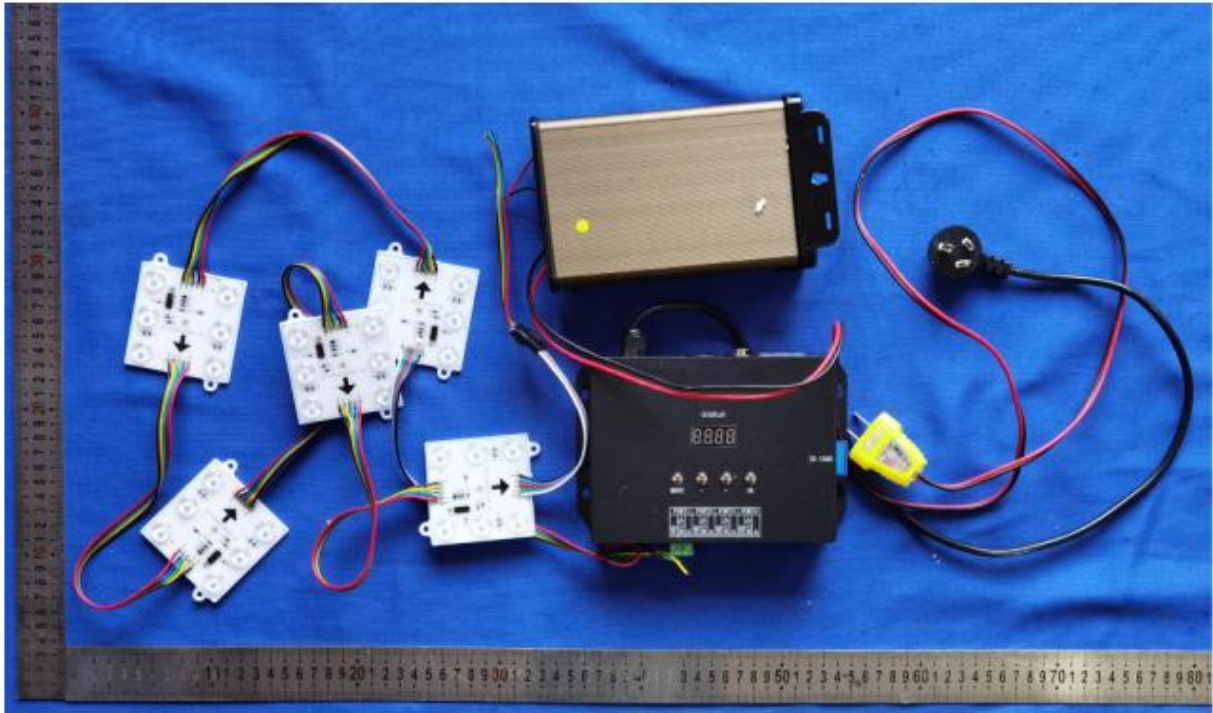

Picture details

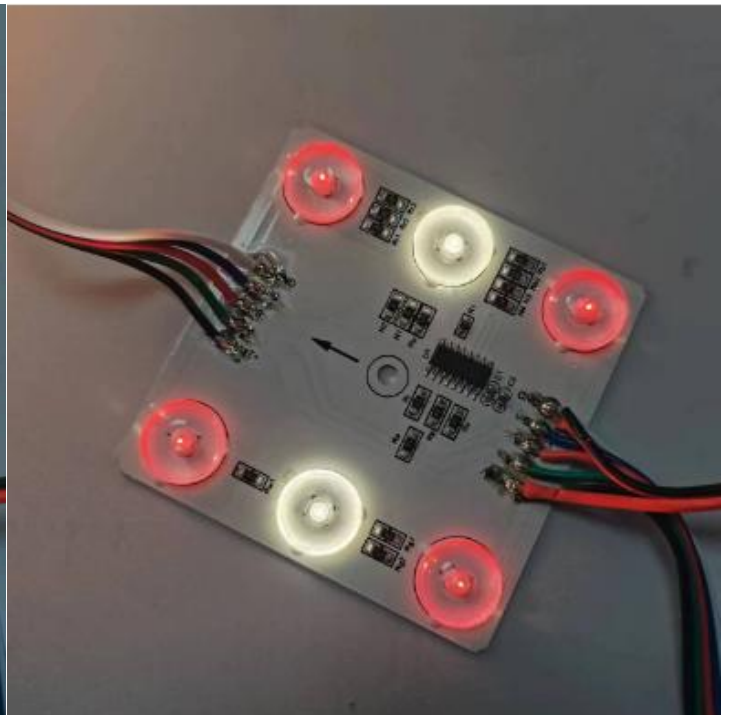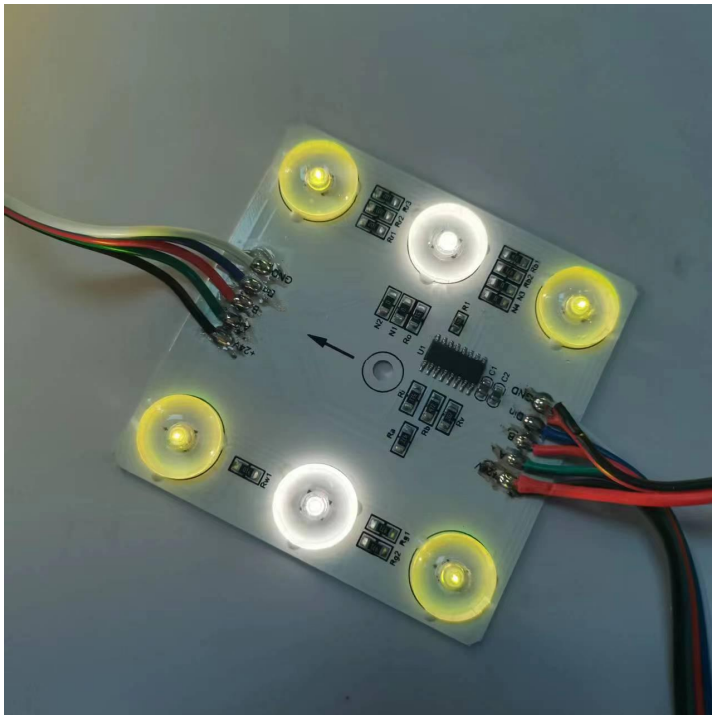

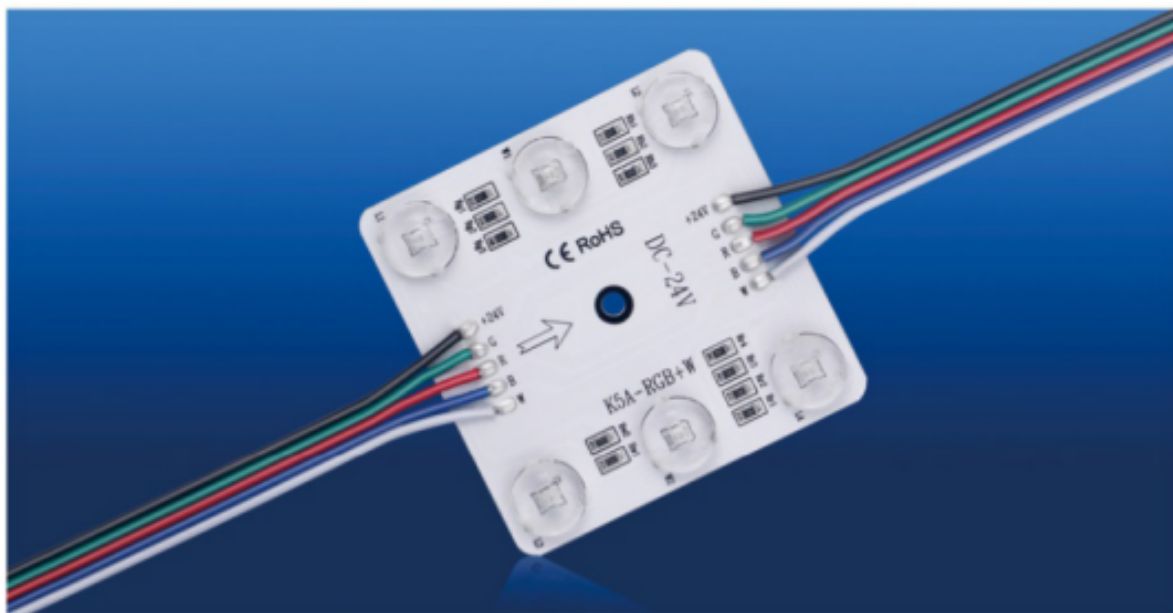

产品型号 Product Model	规格(MM) Size	输入电压(V) Input Voltage	灯珠数 Leds	单组数量 Single Group Quantity	功率(W) Rated power	连接线长 Connection Line Length	颜色 Color
RL-dmx512-3030rgbw-6-24V	70*70*1.0MM	DC24V	6灯/片	20片/组	4W/片	20CM/ 固定制	RGB+W



24V七彩区块

产品优势

- 输入电压DC24V，压降小，亮度高
- RGB+W，白光常亮、可做照明
- 175°透镜，发光角度大，高透光亚克力材质，颜色均匀
- 使用安全可靠；任意摆放、异型灯箱方便
- 颜色可调节，模式可切换
- 适用于大理石背景、冲孔板等场景

光学数据分布

