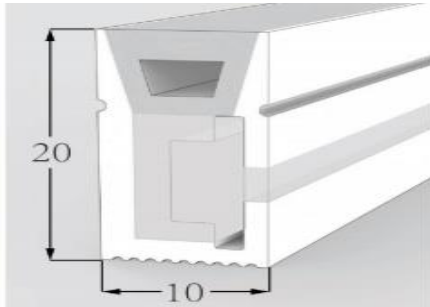


RL-Neon-5050RGB-10mm*20mm

Specifications

Picture	Dimension	Parameters	
		VOLTAGE	AC 220V
		POWER	14W
		LED CHIP	5050 RGB
		LEDs QTY	60 leds/m
	COLOR	RGB addressable	
	IP RATING	IP 65	
	BEAM ANGLE	120°	
			Lifespan
板宽 PCB Width(mm)	10		
重量 Weight(g/m)	190		
截面尺寸 Section size(mm)	10*20		
发光角度 Beam angle	120°		


Features

Model	RL-Neon-5050RGB-AC220V-10mm*20mm
Light Source	SMD 5050 LED chip
Beam Angle	120°
LED Quantity	60 leds/m10pixels per meter
Input Voltage	AC220V
Power	14W
Color	RGB
Size	10*20mm
Operation Temperature	-30°C- 50°C
Waterproof	IP65

Advanatges

1. High luminous with SMD 5050RGB leds.
2. Bright and even light emitting - no dark or spot lighting.
3. Easy to control - doesn't require art-net controllers or pixel mapping
4. IP 65 waterproof rating - it's ideal to use in wet environment.
5. High lifespan of over 50 000 hours - use high quality SMD 5050 Epistar led chip.

Applications

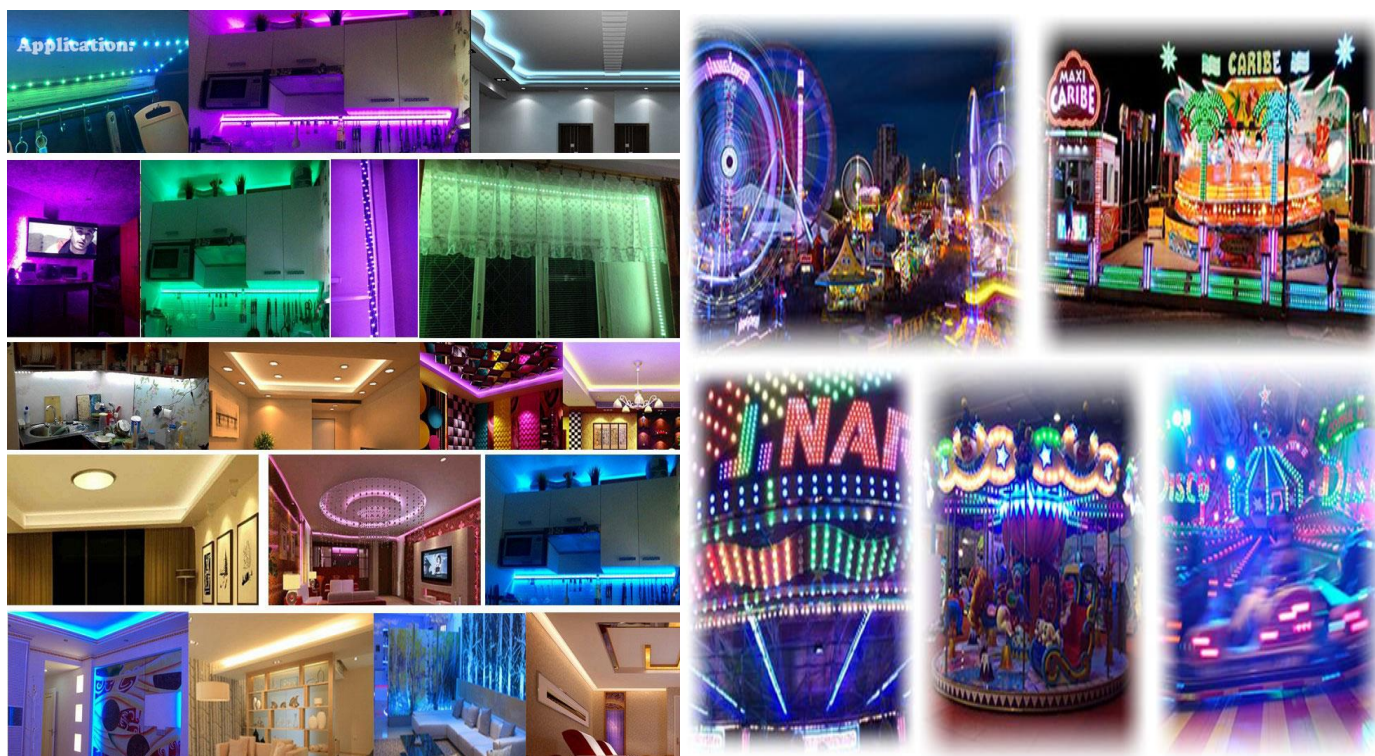

1. **Amusement Park Rides Light**
Ferris wheel, Carousels, Pirate ship, Tower, etc.
2. **Advertisement Outdoor Signboard Backlight**
Signage, Channel letter, Signs, Billboard, etc.
3. **Stage Decoration Light**
KTV, Disco, Bar, Night club and other stage light.
4. **Commercial Light**
Hotel, Shopping mall, Theater, etc.

Packing & Weight



Weight/10pcs	Pieces/bag	Pieces/carton	G.W/carton	Carton size
10kg	1pcs	20pcs	20kg	48cm*48cm*28cm